

WORLD INTELLECTUAL PROPERTY ORGANIZAT



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : B01D 35/143	A1	(11) International Publication Number: WO 94/2255		
2012 00/1.0	,	(43) International Publication Date: 13 October 1994 (13.10.94		
(21) International Application Number: PCT/NLS (22) International Filing Date: 29 March 1994 (2 (30) Priority Data: 9300554 29 March 1993 (29.03.93)		CZ, DE, DE (Utility model), DK, ES, FI, GB, HU, IF KP, KR, KZ, LK, LU, LV, MG, MN, MW, NL, NO, NZ PL, PT, RO, RU, SD, SE, SI, SK, TT, UA, US, UZ, VN European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF)		
 (71) Applicant (for all designated States except US): D A.V.V. [NL/NL]; Bilderdijk 16, Oranjestad, Aruba (72) Inventor; and (75) Inventor/Applicant (for US only): DEN DEKKER, D Marinus [NL/NL]; Eeuwigelaan 16, NL-1861 CM (NL). (74) Agent: METMAN, Karel, Johannes; Octrooibureau Stigter B.V., Weteringschans 96, NL-1017 XS Am (NL). 	irk, Jar Berge	With international search report.		

FOR USE THEREIN

(57) Abstract

An assembly of a filtering apparatus and a replaceable filter comprises an electronic filter identification system having an electronic label on the filter and read-out means on the filtering apparatus. The read-out means is connected to a control unit of the filtering apparatus and the control unit is influenced by the read-out means. For example, the control unit is only actuatable upon disposing a filter in the filtering apparatus having a proper label. The filter identification system may be interactive.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NB	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	TE.	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP ·	Japan	PT	Portugal
BY	Belanus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic	SD	Sudan
CG	Congo		of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SI	Slovenia
CI	Côte d'Ivoire	KZ.	Kazakhstan	SK	Slovakia
CM	Cameroon	ü	Liechtenstein	SN	Senegal
CN	Chica	LK	Sri Lanka	170	Chad
	Czechoslovakia	LU	Luxembourg	TG	Togo
cs cz		LV	Latvia	TJ	Tajikistan
_	Czech Republic	MC	Monaco	17	Trinidad and Tobago
DE	Germany			UA	Ukraine
DK	Denmark	MD	Republic of Moldova	US	United States of America
ES	Spain	MG	Madagascar		
FI	Finland	ML	Mali	UZ	Uzbekistan
FR	Prance	MN	Mongolia	VN	Vict Nam
C.A	Gehon				

WO 94/22551
Assembly of filtering apparatus and replaceable filter; and filtering apparatus and filter for use therein

The invention relates to an assembly of a filtering apparatus and a replaceable filter.

In various types of filtering apparatuses, such as industrial exhausters, vacuum cleaners, filtering devices in lubrication systems etc., the filter should be replaced periodically because clogging will degrade its operation. When it is replaced several things can go wrong, such as incorrect fitting, fitting of a wrong or unapproved type and the like, which jeopardizes the correct operation of the filtering apparatus or even the personal safety.

It is the object of the invention to provide an assembly of filtering apparatus en replaceable filter in which this disadvantage is removed in an effective way.

For this purpose, the assembly according to the invention is characterized by an electronic filter identification system including an electronic label on the filter and read-out means on the filtering apparatus.

Due to these features it is permitted that the readout means checks the correct fitting of a proper filter type 20 by means of the label thereby avoiding mistakes.

It is for example possible that the read-out means is connected to a control unit of the filtering apparatus and the control unit being influenced by the read-out means, in which preferably the control unit is only actuable upon disposing a filter in the filtering apparatus having a proper label. In this way it is impossible to operate the filtering apparatus together with an improper filter, avoiding undesirable or even dangerous situations.

In a further development of the invention, the filter itself counts the number of operating hours of the filter and to switch off the filtering device if the maximum permitted number of operating hours has been reached. This prevents the filter from being used too long which would endanger the proper operation of the filter. Since the label in the filter itself counts the number of operating hours, a

ť,

5

correct counting is maintained also when the filter is removed from the filtering apparatus and is fitted again in the same or another filtering apparatus, so that a timely warning for the end of the operating time is ensured.

Preferably, the filtering apparatus comprises an indicating means such as a display or indicator lamps of a control panel, for showing information on the filter.

With this indicating means an operator can be provided with information received by the read-out means of the filter label, for example the fitting of an incorrect filter, or the attainment of the maximum operating time, so that the necessary actions can be taken immediately.

The invention includes both the assembly of filtering apparatus and filter, and the filtering apparatus and the filter having the features as mentioned separately.

The invention will hereafter be elucidated with reference to the drawing showing a substantially simplified diagram of an exemplary embodiment of the invention.

apparatus indicated by reference numeral 1 and accommodating therein an exchangeable filter 2. The filtering apparatus 1 may be part of a great number of different types of apparatus, such as for instance industrial exhausters to be used in welding operations for example, in vacuum cleaners or also in fluid circuits in which a fluid is filtered during each circulation. The fluid includes both air, gas and liquids. The filter 2 will preferably be a mechanical filter in which the fluid is guided through a porous material or a material structure having small passage openings separating solid

matter from the fluid. For this purpose, the drawing shows a fluid line 3 extending through the filter 2, and a pressure or vacuum source 4, for example a pump, for forcing the fluid through the filter 2.

The replaceable filter 2 has an electronic label 5 to
35 be read out by a read-out means 6 which is mounted in the
filtering apparatus 1 and in this case being connected to a
central control unit 7 controlling the operation of the
filtering apparatus 1 or the machine accommodating the
filtering apparatus 1 and to which the pressure or vacuum
source 4 is connected. The figure also shows a control panel 8

connected to the control unit 7.

The electronic label 5 comprises information on the filter 2 which is readable by the read-out means 6. Label 5 and read-out means 6 together form an electronic 5 identification system which may be provided in several embodiments. In a simple embodiment one may use for example resonance circuits, magnetic strip cards or optical cards, in which systems the label can only act as transmitter and the read-out means as receiver. In more sophisticated systems 10 there may be an interaction of label and read-out means so that both label and read-out means are transmitter and receiver at the same time. In these identification systems use can be made of a chip card having a small piece of an EEPROM (a read and write memory remaining in tact without electric 15 supply), a "PIT" (programmable identification tag) in which a chip card is used, but in which both the energy and the information is transmitted a distance without contact, or a so-called smart card in which the memory of a chip card is extended to a complete micro controller able to carry out full 20 computations.

All systems are able to transmit information from the label to the read-out means in the filtering apparatus. As a result it is possible to use the read-out means to check the fitting of the correct type of filter in the filtering

25 apparatus. The program of the filtering device may be such that, if not the right filter is fitted, the control unit 7 is inhibited and the filter apparatus or the machine incorporating said filtering apparatus being prevented from being switched on. Consequently, the personal safety and the correct operation of the apparatus is secured. It might be possible to have the control panel 8 indicated that another filter should be fitted.

When an interactive system is used, the features of the filter identification system may be extended substantially. For example, the actual operating time of the filter may be stored in the label 5 of the filter 2 which will be prevent the filter from being used too long. The user may be warned by an indication on the control panel 8 or the apparatus may be switched off if the maximum permitted operating time is exceeded. During the use of the filter, the

5

operator may be kept informed of the number of operating hours of the filter 2 through the operating panel 8. Of course, other exchanges of information within the interactive system are conceivable.


Particularly, with filters which are used for filtering danger substances, for example asbestos, it may be useful to provide the label 5 of the filter 2 with a copy protection so that only approved filters adapted to the requirements may be used and other filters will be refused by 10 the filtering apparatus 1.

The invention is not restricted to the embodiment shown in the drawing and described herein before which may be varied in different manners within the scope of the invention.

A further extension of the embodiment includes an 15 interactive identification system to store data from the filtering apparatus in the label, data may for example relate to substances which are retained within the filter during filtration. These data may be read out with a portable unit in a waste treatment works in order to determine the best way to 20 dispose the filter as waste.

CLAIMS

- 1. Assembly of a filtering apparatus (1) and a replaceable filter (2), characterized by an electronic filter identification system including an electronic label (5) on the filter and read-out means (6) on the filtering apparatus.
- 2. Assembly of claim 1, wherein the read-out means
 (6) is connected to a control unit (7) of the filtering
 apparatus (1) and the control unit (7) being influenced by the
 read-out means (6).
- 3. Assembly of claim 2, wherein the control unit (7) is only actuable upon disposing a filter (2) in the filtering apparatus (1) having a proper label (5).
 - 4. Assembly of one of the preceding claims, wherein the filter identification system (5, 6) is interactive.
- 5. Assembly of claim 4, wherein the label (5)
 15 comprises a read and write memory adapted to store the number of operating hours of the filter (2).
 - 6. Assembly of one of the preceding claims, wherein the filtering apparatus comprises an indicating means (8) such as a display or indicator lamps of a control panel, for showing information on the filter (2).
 - 7. Assembly of one of the preceding claims, wherein the label (5) comprises a copy protection.
 - 8. Filtering apparatus for use in the assembly of one of claims 1-7.
- 9. Filter for use in the assembly of one of claims 1-7.

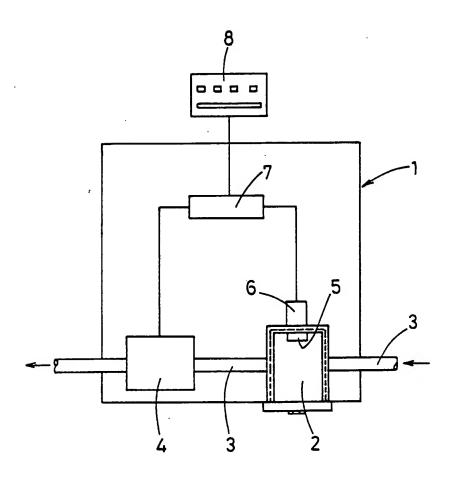

ľ

INTERNATIONAL SEARCH REPORT

International application No.

	•	CITIL 3	+/ 0000/
A. CLASS IPC 5	BO1D35/143		٠.
According	to International Patent Classification (IPC) or to both national class	ification and IPC	·
	S SEARCHED		
Minimum of IPC 5	documentation searched (classification system followed by classifica B01D	ation symbols)	
Documenta	tion searched other than minimum documentation to the extent that	such documents are included in the fields	searched ·
Electronic	data base consulted during the international search (name of data ba	ise and, where practical, search terms used)	
C. DOCUN	MENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the	relevant passages	Relevant to claim No.
A	EP,A,O 202 201 (ITALIDEE) 20 November 1986 see page 8, line 1 - line 3; claims 1-10		1
A	DE,A,31 26 850 (PETT MANFRED) 11 1982		1
·	see page 4, line 24 - line 30	7.	_
A	US,A,4 654 140 (YEN-MING CHEN) 31 March 1987 see column 3, line 48 - line 57; figures 1-10		1
			L
Furt	ther documents are listed in the continuation of box C.	Patent family members are listed	in annex.
'A' docum consider to docum which citatio 'O' docum other 'P' docum later to	neet defining the general state of the art which is not letted to be of particular relevance document but published on or after the international date ent which may throw doubts on priority daim(s) or is cited to establish the publication date of another in or other special reason (as specified) tent referring to an oral disclosure, use, exhibition or means ent published prior to the international filing date but han the priority date claimed	"T" later document published after the interpretation or priority date and not in conflict we cited to understand the principle or to invention." X' document of particular relevance; the cannot be considered novel or cannot involve an inventive step when the description of particular relevance; the cannot be considered to involve an indocument is combined with one or ments, such combination being obvious the art. & document member of the same patents.	the deplication but theory underlying the claimed invention of the considered to occurrent is taken alone claimed invention mentive step when the more other such docupous to a person skilled tramily
1	7 June 1994	2 9. 06. 94	
Name and	mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax (+31-70) 340-3016	Authorized officer De Paepe, P	

· 3

INTERNATIONAL SEARCH REPORT

...formation on patent family members

International application No. CT/NL 94/00067

Patent documencited in search report	Publication date	Patent family member(s)	Publication date	
EP-A-0202201	20-11-86	US-A- 4747378	31-05-88	
DE-A-3126850	11-03-82	NONE		
US-A-4654140	31-03-87	NONE		